




| WELDING PROCESSES | |
|---|---|
| ISO4063 | AWS A3.0 |
| 111 | SMAW |
| 135 | GMAW |
| 136 | FCAW-G |
| 141 | GTAW |

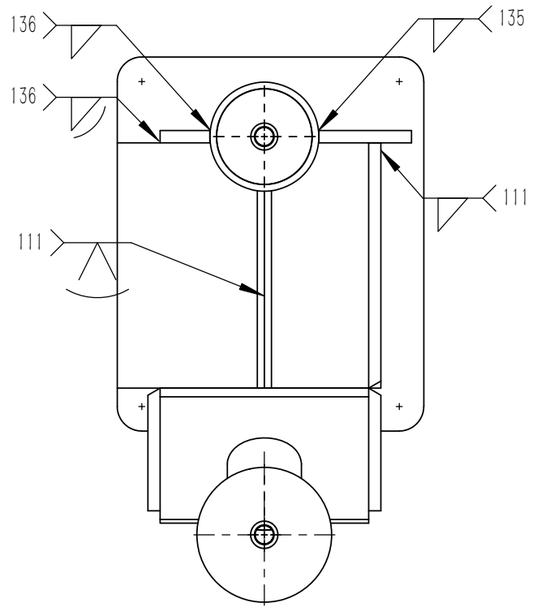


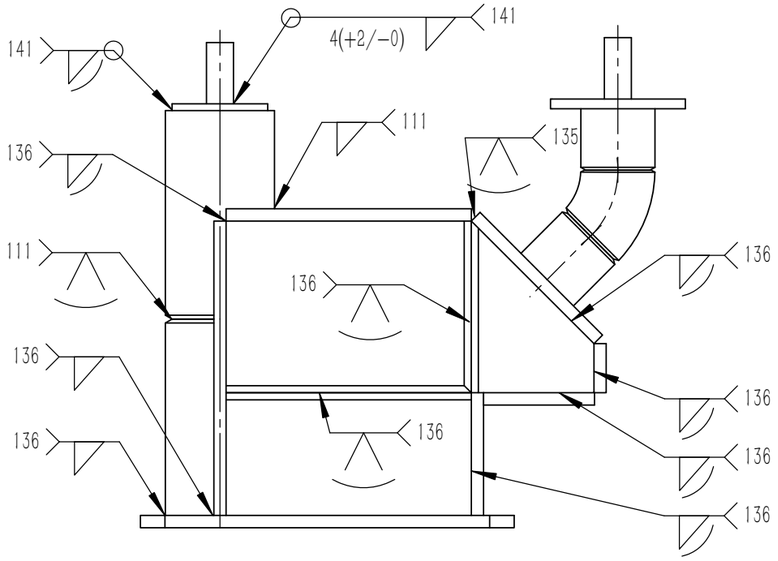

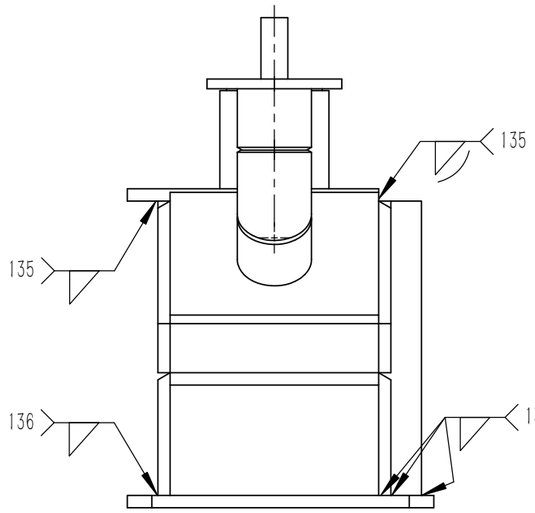


Note: All dimensions in millimeter

INSTRUCTIONS:
1.Tack welds can be makde in any position with and any process
in the most logical sequence for structural squareness and any joint access.
2. All tack welds are to be made shorter than 15mm and placed on the outside
of the vessel only.
3. All welds are to be made as indicated on drawing.
4. All fillet welds except special notes are to be 10mm(+2mm/-0mm） in leg length.
5.Complete all welding with base "A" in the flatposition.
6.Grinding will be limited to :"tack welds,starts, stops, rootpass, face ang toes."
7.Post cleaning : wire brush only after slag removal . No grinding.

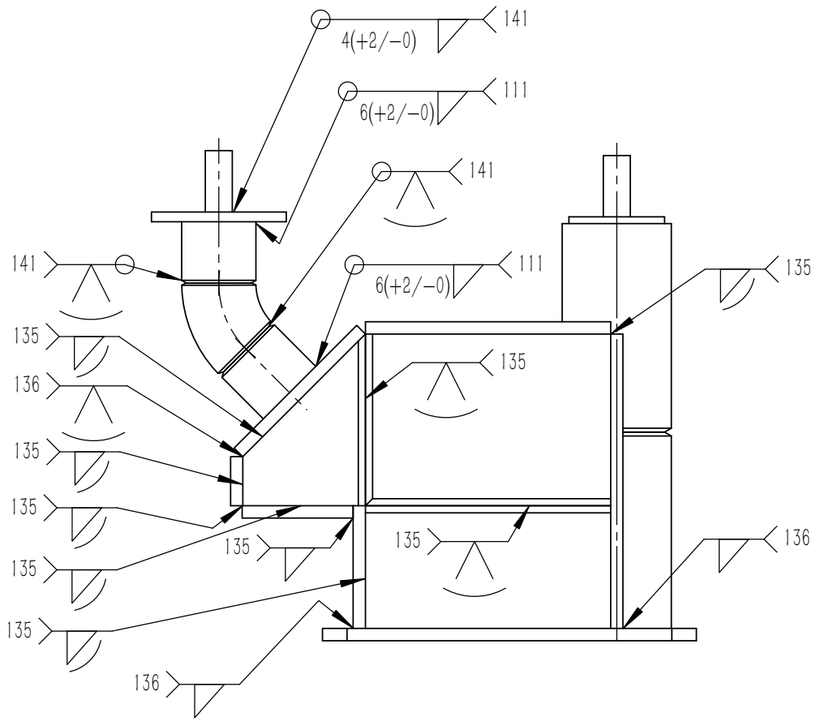Test Project for the 48th WorldSkills
Competition In Shanghai ,China 2026
Copyright © 2026 Worldskills International
All Right Rserved

worldskills

skill: 10 welding

Scale: N. T. S | Date: 17 Aug 2024 | Paper: A3

OR

Designed/ Drawn by : liujingfeng CN

Drawing No. WCS2026_TP10_CN_03_EN

Description: ModuleB:Pressure Vessel ISO A

Rev.x

Page： 1 of 1